SPECTRA B100SLF

Permanent Status Beacon 5W BA9s Filament Bulb

IP Rating: IP65 Temp: -25°C to +50°C

SE Unit weight: 90g

Order code Voltage B100SLF0250B/x 12-250V

Panel mount Ø37mm (PG29) Mountings

Please order correct voltage and wattage. B100SLF unit is supplied without a bulb.

N

Cable entry: Plugable 2.5mm² terminals Dimensions: Ø60 x 65.5mm

x = Lens colour

R = RedA = Amber

B = Blue Y = Yellow G = Green C = Clear

Bulb Type BA9s

BR10125B E2S Part No Version 12V 5W

BR10245B 24V 5W


BR102305B BR10485B BR101305B 115V 5W 230V 5W 48V 5W

Tel: +44 (0)20 8743 8880 Fax: +44 (0)20 8740 4200 mail: sales@ e2s.com web: www.e2s.com






Dimensions in mm

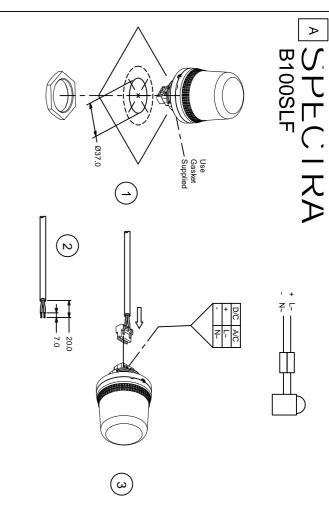



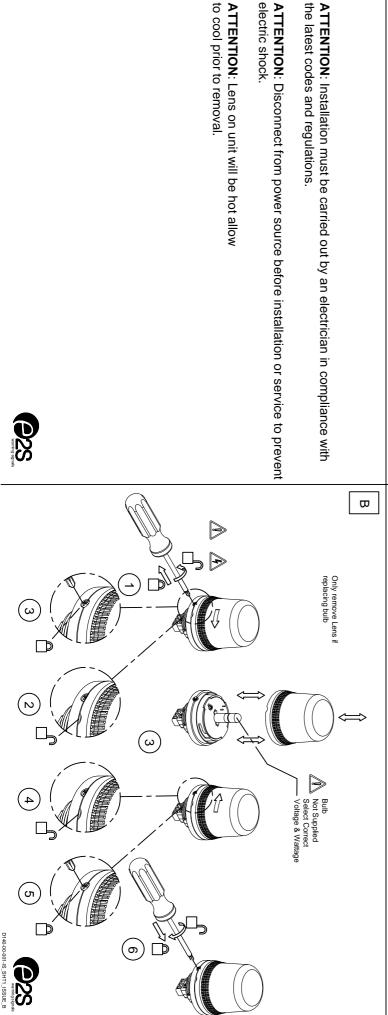



F

electric shock.

9

the latest codes and regulations.

ATTENTION: Installation must be carried out by an electrician in compliance with

to cool prior to removal **ATTENTION**: Lens on unit will be hot allow

